



HIGH PRESSURE HYDRAULICS
PUMPS | CYLINDERS | HIGH FORCE TOOLS



Since 2001, PowerX International, LLC has been collaborating with its customers to design and supply hydraulic products and systems. PowerX was founded by fluid power industry experts. We have the technical expertise to help guide you through any of your hydraulic system and application needs.

Specializing in mobile and high pressure hydraulic cylinders and pumps, our mission is to work closely with our customers to develop innovative solutions at an affordable price. At PowerX, we believe in Quality, Commitment and Value.


Our products are engineered to last. At PowerX we put all of our products through a rigorous battery of tests to ensure they withstand the toughest environments. Whether you are using them on a construction site, inside a mine, on an oil platform or in your factory, you can rely on PowerX products to perform at a high level every time.

Our manufacturing network and facilities are world class and employ lean manufacturing concepts, are **ISO-9000 certified**, and are on the cutting edge of machining and automation. This, coupled with our experienced engineering team, allows us to manufacture tight tolerance components to sophisticated hydraulic systems.

Our products meet or exceed the following industry standards: **ASME B30.1**, **ASME B40.1** and **SAE 100**. All of our products are backed by our lifetime warranty against any manufacturing defects.



Hydraulic Principles

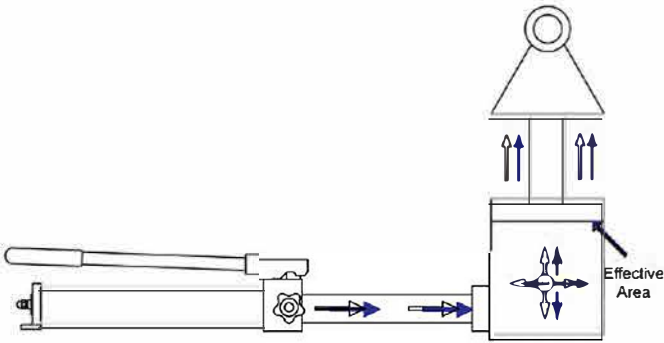

The basic hydraulic system consists of a cylinder, pump and hose. Pumps can be powered manually, air or electric driven.




Formula for Calculation of Output Force:

$$\frac{\text{psi} \times \text{Cylinder Effective Area} \times \text{No. of Cylinders}}{2,000} = \text{Tons}$$

Formula for Calculation of Lifting Speed:

$$\frac{\text{Pump Flow Per Minute}}{\text{Cylinder Effective Area} \times \text{No. of Cylinders}} \times \text{Piston Travel} = \text{in./min.}$$

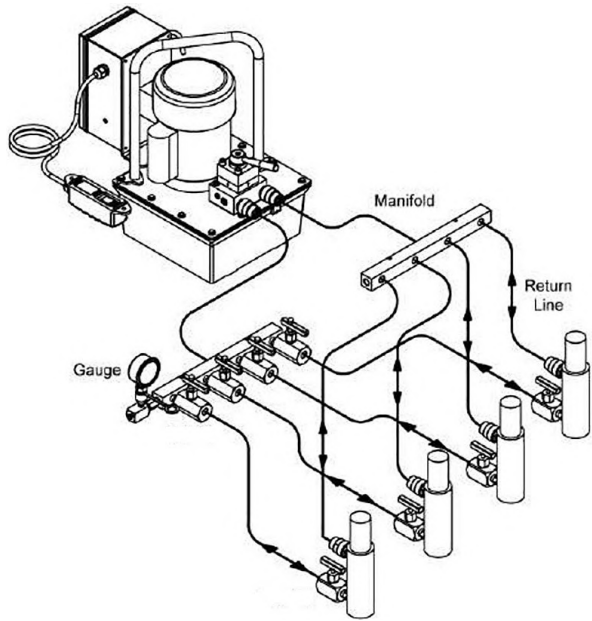

Hydraulic systems can be built to meet various application requirements. Creating a circuit which includes a manifold block with integrated needle valves for flow control is one way to individually control cylinders in a multi-point lift system.

Flow: Created by the pump.

Pressure: Created by resistance to flow.

Force: The amount of force a hydraulic cylinder can generate is equal to hydraulic pressure times the effective area of the cylinder. (Effective area is the surface area of the piston face in square inches.) For multiple cylinder systems, multiply the effective area times the number of cylinders times pressure to determine system force.

Speed: When using a “power pump” the speed at which your cylinder will lift is determined by dividing the pump’s flow by the cylinder’s effective area.



1. Choose The Right Cylinder.



You must know the weight of what you intend to lift and choose a cylinder with at least 20% more capacity. Be aware of possible load shift requiring more capacity at the particular lifting point.

2. Check each component before setting up.



Check each component before you set up your hydraulic system. Do not use damaged or worn components. Please contact your nearest PowerX distributor, or contact the PowerX factory if your components are worn.

3. Safety Instructions




Read all warning labels and instructions. Operating instructions must be understood before using equipment. Never remove labels from equipment. Replace missing, worn, or damaged labels. Always wear safety goggles and protective clothing when using hydraulic equipment.

4. Each Jack Or Ram Must Be Fully Supported At The Base.




Every jack or cylinder, whether used individually or in a system, should be completely supported on a solid, firm, non-sliding foundation capable of supporting the load.

5. Fill Oil Reservoirs With Cylinder Retracted.

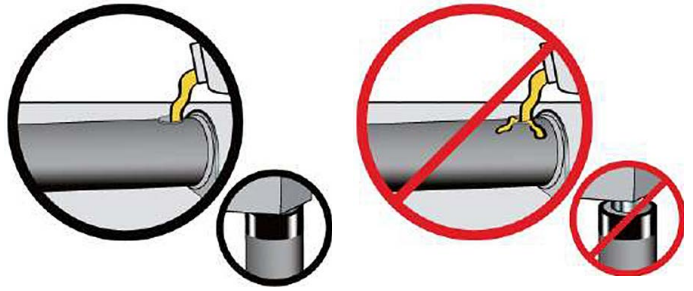


Only fill pump to recommended level, and fill only when connected cylinder is fully retracted.

6. Know How Your Hydraulics Work.




Do not use extensions or cheater bars on hydraulic jacks or hand pumps to raise a load.

7. Center The Load On The Lifting Point.




The load must be centered on the cylinder, or equally distributed on multiple cylinders. Off center loading can result in the cylinder slipping out and loss of the load.

8. When Using Multiple Cylinders, Distribute The Load Evenly.



For multiple cylinder lifts, you must be able to determine the location and number of lifting points that will allow the load to be evenly distributed to all the cylinders. This is called load balance. Size, center of gravity, and load geometry must be considered in order to correctly determine load balance.

9. Block Or Crib Your Load As It Raises.




Place blocking or cribbing under the loads as you raise it. Each time you raise it higher, insert more blocking. Position yourself in a manner that will keep you clear of the load, and will not allow your hands or other body parts between the load and the cribbing.

10. Do Not Use Cylinders As Permanent Supports.



Hydraulic cylinders are not meant to be used as permanent supports, but are designed to lift and lower. If you need to hold the load for any length of time, cribbing or locknut cylinders should be used.

11. Hydraulic Connections.

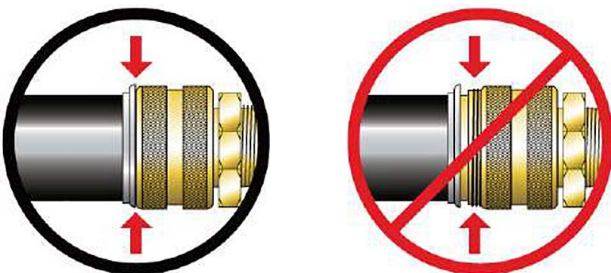


When making connections with quick couplers, make sure the couplings are fully engaged. Threaded connections such as fittings, gauges, etc. must be securely tightened and leak free. Never use excessive tightening force that may distort the fittings or strip the thread profile.

12. Avoid Extreme Heat Or Weld Splatter.



Weld splatter will damage plunger rods and hoses. Hydraulic fluid can ignite if vaporized or exposed to high temperatures.

13. Hydraulic Disconnections.

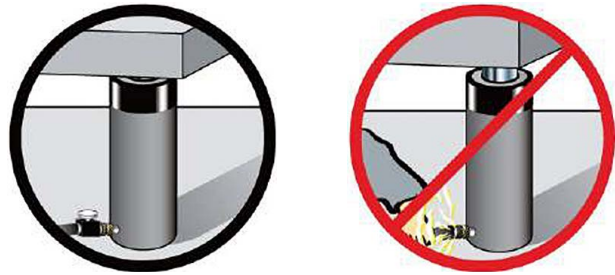


Never attempt to disconnect hydraulic hoses, fittings or couplers under pressure. Unload the cylinder, open the release screw on the hand pump and shift or open all hydraulic controls several times. If system includes a gauge, double check the gauge to insure pressure has been completely released.

14. Do Not Carry Or Drag Pumps And Cylinders By Their Hoses.



Dragging or carrying cylinders or pumps by a connected hose can damage the couplers and hoses. Using damaged couplers and hoses can be dangerous.

15. Keep Hydraulic Hoses Free Of Obstructions.

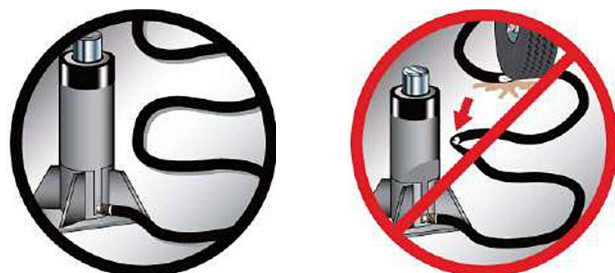

Do not drop sharp or heavy objects on hose. Keep hose out of heavy traffic areas. This will cause internal damage to hose wire strands. Applying pressure to a damaged hose may cause it to rupture. Avoid sharp bends and kinks when routing hydraulic hoses.

Cylinder / Pump Combinations

		Single Acting Cylinders																								
		C5 (All Strokes)	C10 (All Strokes)	C15-2	C15-4	C15-6	C15-8	C15-10	C15-12	C15-14	C25-1	C25-2	C25-4	C25-6	C25-8	C25-10	C25-12	C25-14	C5-2	C5-4	C5-6	C5-10	C5-13	CL00-6	CL100-10	
Hand Pump	P21L	●	*	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	P37	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	P43	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	P61L	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	P122	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	P122HF	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
P427	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Air Hydraulic Pump	PA9-37	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PA9-61	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PA6-98B	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PA6-98C	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PA6-98R	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PA6-122	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
PA6-231	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Electric Pump	PE28x	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PX39X	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PX59x	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

* 10", 12" and 14" strokes are not recommended

		Automotive Cyl.					Flat Cylinders							Low Profile Cyl.					Hole Thru Cylinders									
		CA 5-5	CA 10-6	CA 10-10	CA 25-6	CA 25-10	CA 25-14	CF5	CF10	CF20	CF30	CF50	CF75	CF100	CF150	CL10-1	CL20-2	CL30-2	CL50-2	CL100-2	CH20-2	CH30-2	CH30-6	CH60-3	CH60-6	CH100-3	CH100-6	CH100-10
Hand Pump	P37	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	P43	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	P61L	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	P122	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	P122HF	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	P427	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Air Hydraulic Pump	PA9-37	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PA9-61	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PA6-98B	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PA6-98C	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PA6-98R	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PA6-122	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
PA6-231	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Electric Pump	PE28x	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PX39X	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PX59x	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

		Double Acting Cylinders										
		CD10-6	CD10-10	CD10-12	CD30-8	CD30-14	CD55-6	CD55-13	CD80-6	CD80-13	CD100-6	CD100-13
Hand Pump	P122DL	●	●	●	●	●	●	●	●	●	●	●
	P427D	●	●	●	●	●	●	●	●	●	●	●
Air Hydraulic Pump	PA6-98D	●	●	●	●	●	●	●	●	●	●	●
	PA6-231D	●	●	●	●	●	●	●	●	●	●	●
	PA6-460D	●	●	●	●	●	●	●	●	●	●	●
Electric Pump	PE28x	●	●	●	●	●	●	●	●	●	●	●
	PX39X	●	●	●	●	●	●	●	●	●	●	●
	PX59x	●	●	●	●	●	●	●	●	●	●	●

Take the guesswork out of your pump and cylinder combination decisions. Use our simple guide for which pump and cylinder combinations are right for your job.

Generally Recommended	●
Marginal, Check Requirements	●
Not Recommended for Most Applications	●



TABLE OF CONTENTS

ELECTRIC PUMPS	7-8
HAND PUMPS	9-10
ULTRA HIGH PRESSURE HAND PUMPS	11
AIR OVER HYDRAULIC PUMPS	12-13
HYDRAULIC JACKS	14
FLAT BODY CYLINDERS	15
CENTER HOLE CYLINDERS	16
SINGLE ACTING CYLINDERS	17-18
AUTOMOTIVE CYLINDERS	19
LOW PROFILE CYLINDERS	20
DOUBLE ACTING CYLINDERS	21-22
HYDRAULIC PULLER KITS	24
PORTABLE POWER KITS	25
HYDRAULIC SPREADERS	26
NUT SPLITTERS	27
SYSTEM COMPONENTS	28-32
HIGH TONNAGE CYLINDERS	23
POSI LOCK PULLERS AND ACCESSORIES	33-47
H-FRAME PRESSES	48-49

ELECTRIC PUMPS

Part Number	Motor Size (hp)	1st Stage Flow (in3/min)	2nd Stage Flow (in3/min)	Use with Cylinder	Valve Type**	Valve Function	Reservoir Capacity***
PE283	3/4	350	28	Single Acting	3W3P Manual	Advance Hold Return	2 gal 3 gal 5 gal 10 gal
PE393	1	550	39				
PE593	1 1/2		59				
PE1133	3	605	113	Double Acting	4W3P Manual		
PE284	3/4	350	23				
PE394	1	550	39				
PE594	1 1/2		59				
PE1134	3	605	113				

* See Next Page For Pump Options

DESCRIPTION

- Designed in the USA. Low noise level meets OSHA standards (80 dba).
- Two stage hydraulic system - 10,000 PSI/700 Bar capacity - first stage gerotor pump, second stage radial piston pump.
- Interchangeable control valves (2, 3, or 4-way) and reservoirs.
- One piece motor and valve mounting plate with an integral high flow unloading system.
- External adjustable relief valve for pre-setting maximum operation pressure (2,000 PSI - 10,000 PSI range).
- Standard motors are induction type, single phase, 1725 RPM, 115/230 V, 60 Hz; 3HP, 230/460 V, 3 PH, 60 Hz.*



Pump with Solenoid Valve Control



Pump with Pendant Control



Pump with Manual Control

Our pumps are fully customizable to your desired specifications. Use this matrix as a guide in creating your own custom built electric pump.

If you are looking for a pump with an output flow of 59 cu.in./min, with a manually operated 3 position 4 way valve, controlled by an on/off switch mounted on the electric motor, with a 3 gallon reservoir the model number would be a:

PE594-03MD-15B-C-01

Other electrical and motor control options are available upon request. For assistance, please call your local PowerX distributor.

		PE	59	4-03	M	A	-	15	B	-	C	-	01			
Pneumatic Powered	PA	Pump												Series	01	Design Series
Electric Powered	PE													A	No Reservoir	
Gas Engine Powered	PG													B	2 Gallon w/handles and feet (1 gallon of useable oil)	
28 Cu.In. / Min.	28												C	3 Gallon w/handles and feet (2 gallon of useable oil)		
39 Cu.In. / Min.	39												D	6 Gallon w/handles (5 gallon of useable oil)		
59 Cu.In. / Min.	59	High Pressure												E	10 Gallon w/handles (9 gallon of useable oil)	
113 Cu.In. / Min.	113	Displacement **												Reservoir Size		
No Valving	0-00												A	No Electric Motor		
Port only manifold (no valve)	0-01												B	110/220 VAC, 60 Hz, 1Ø, 1800 RPM, TEFC		
3 way, 2 position	3-02												C	110/220 VAC, 50 Hz, 1Ø, 1500 RPM, TEFC		
3 way, 3 position, tandem center	3-03												D	110/220 VAC, 60 Hz, 1Ø, 1800 RPM, TENV		
4 way, 3 position, tandem center	4-03	Valve												E	110/220 VAC, 50 Hz, 1Ø, 1500 RPM, TENV	
Manual	M												Motor frequency and frame type †			
Solenoid*	S	Valve Actuator												00	No Electric Motor	
No power cord or controls	A												05	1/2 HP		
Power cord and switch only, US*	B												07	3/4 HP (standard for the PE28 pump)		
Power cord and switch with single push button pendant (110 VAC only), US only*†	C												10	1 HP (standard for the PE39 pump)		
Power cord (w/o plug) and switch only*	D												15	1-1/2 HP (standard for the PE59 pump)		
Power cord (w/o plug) and switch with single push button pendant (110 VAC only)*†	E												30	3 HP (standard for the PE113 pump)		
Power cord single push button pendant, 24VAC pendent control. Remote, Off, Run Control (110 VAC only)*†	F												Motor Size *			
Power cord with dual push button pendant, 24VAC pendent control for 3 positions valves with solenoids (110VAC only)*†	G	Electric Controls														

* Not available on PA or PG models

† Consult PowerX International for additional voltages

** At 1725 rpm

HAND PUMPS

Part Number	Pressure Rating (psi)		Usable Oil Capacity (in3)	Reservoir Capacity (in3)	Oil Volume/Stroke (in3)		Reservoir Construction	Use with Cylinder	Weight (lbs.)
	1st Stage	2nd Stage			1st Stage	2nd Stage			
P21L	200	10,000	21	31	0.79	0.10	aluminum	S/A	5.1
P37		10,000	34	46	0.79	0.17	steel	S/A	17
P43	-	10,000	39	52	-	0.20	steel	S/A	17
P61L	200	10,000	46	61	0.79	0.10	aluminum	S/A	9.1
P122		10,000	110	128	0.79	0.17	steel	S/A	28
P122DL		10,000	99	122	0.79	0.14	aluminum	D/A	16
P122HF	400	10,000	122	153	2.4	0.17	steel	S/A	26
P213		10,000	213	213	1.8	0.20	steel	S/A	36
P427		10,000	427	427	6.89	0.24	aluminum	S/A	55
P427D		10,000	427	427	6.89	0.24	aluminum	D/A	60



P43



P61L



P122



P122DL



P427





P427D

DESCRIPTION

- Rugged steel or aluminum alloy body construction and low handle efforts.
- Both single and two speed models available for single and double acting cylinders.
- Connect to double acting cylinders with no need for additional control valve or adapters needed.
- Pressure relief valves for overload protection.
- Load release valve for single acting cylinder usage.

Hand Pumps

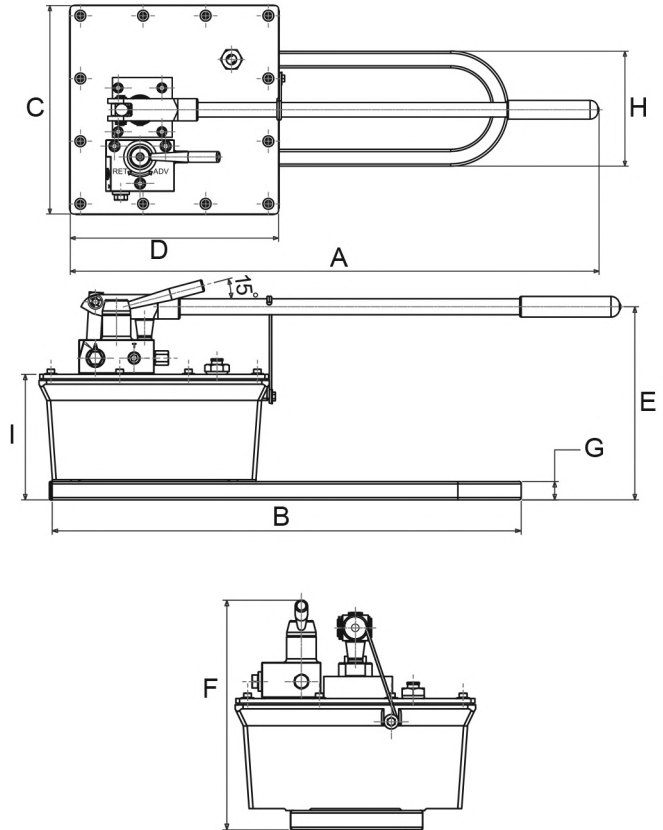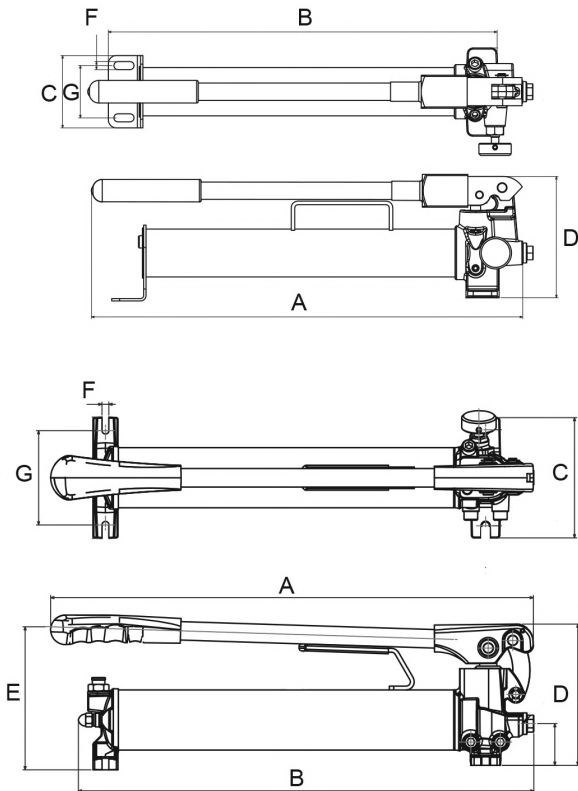

Part Number	A (In.)	B (In.)	C (In.)	D (In.)	E (In.)	F (In.)	G (In.)	H (In.)	I (In.)
P21L	15.40	14.21	4.81	4.99	5.11	N/A	N/A	N/A	N/A
P37	21.32	20.28	5.92	5.81	5.59	N/A	N/A	N/A	N/A
P43	25.12	21.91	5.93	5.81	5.66	N/A	N/A	N/A	N/A
P61L	21.21	19.70	4.81	5.00	5.13	N/A	N/A	N/A	N/A
P122	23.00	21.60	5.80	6.63	7.60	0.41	4.00	N/A	N/A
P122DL	24.00	22.80	5.60	5.30	5.30	N/A	N/A	N/A	N/A
P122HF	24.92	22.26	5.91	7.68	8.74	0.31	4.80	N/A	N/A
P213	24.90	20.80	5.70	6.80	7.40	0.40	3.20	N/A	N/A
P427	30.98	25.00	12.20	12.20	10.28	11.73	0.98	6.73	6.69
P427D	30.98	25.00	12.20	12.20	10.28	11.73	0.98	6.73	6.69

HAND PUMPS

Part Number	Pressure Rating (psi)		Usable Oil Capacity (in3)	Reservoir Capacity (in3)	Oil Volume/Stroke (in3)		Reservoir Construction	Use with Cylinder	Weight (lbs.)
	1st Stage	2nd Stage			1st Stage	2nd Stage			
P61L-40K	200	40,000	61	61	0.79	0.04	aluminum	S/A	11.7
P122L-22K		22,000	122	122	0.79	0.06	aluminum	S/A	14.8
P61L-15K		15,000	46	61	0.79	0.10	aluminum	S/A	7.7




DESCRIPTION

- Rugged aluminum alloy construction with low handle efforts
- Lightweight design for easy portability
- Pressure relief valves for overload protection
- Provides ultra high pressure application at a light weight

Dimensions

Part Number	A (In.)	B (In.)	C (In.)	D (In.)	E (In.)	F (In.)	G (In.)	H (In.)
P61L-40K	24.4	19.2	3.1	5.5	4.3	6.2	1.0	1.5
P122L-22K	27.5	24.8	5.9	4.0	6.0	6.2	1.9	1.5
P61L-15K	21.2	19.7	4.3	3.0	5.7	5.0	1.7	1.5

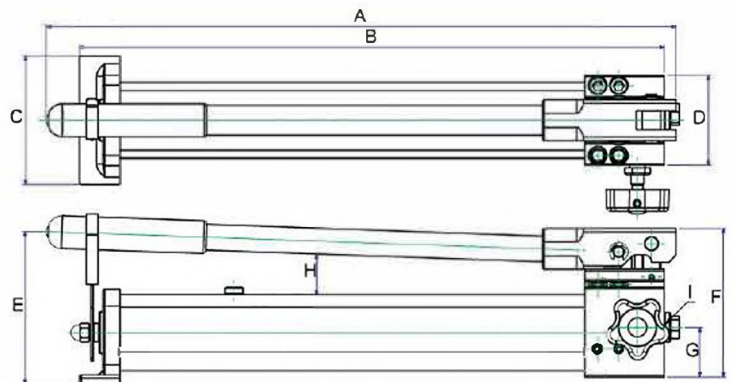

Air Over Hydraulic Pumps



PA9 shown with optional air fitting.

PA9 SERIES

AIR OVER HYDRAULIC PUMPS - PA9 SERIES

Part Number	Pressure Rating (psi)	Usable Oil (in3)	Flow rate in3/min		Reservoir Construction	Use with Cylinder	Weight (lbs.)
			No Load	10,000 psi			
PA9-37	10,000	37	132	16	aluminum alloy	S/A	12
PA9-61		61					16

AIR OVER HYDRAULIC PUMPS - PA6 SERIES

Part Number	Pressure Rating (psi)	Usable Oil (in3)	Flow Rate in3/min		Reservoir Construction	Use with Cylinder	Weight (lbs.)			
			No Load	At Load						
PA6-98B	3,500	98		48	cast aluminum		20			
PA6-98C				13			16			
PA6-122	10,000	122	82	13	aluminum alloy	S/A	20			
PA6-98R		98					23			
PA6-231		231					32			
PA6-122D		122					22			
PA6-231D		231				32				
PA6-460D		460							D/A	44

DESCRIPTION

- Air Hydraulic Turbo speed operation offering high flow at high pressure.
- Hydraulic port swivels for easy connection.
- Air pressure range 40-170 PSI.
- PA9 with mounting plate to be securely fastened.
- PA9 pumps can work in horizontal or vertical position.
- Pressure relief valve for overload protection.



PA6-98C



PA6-98R




PA6 SERIES

AIR OVER HYDRAULIC PUMPS - PA11 SERIES

Part Number	Pressure Rating (psi)	Usable Oil (in3)	Flow Rate in3/min		Reservoir Construction	Use with Cylinder	Weight (lbs.)
			No Load	3,200 psi			
PA11-122	3,200	122	143	44	aluminum alloy	S/A	20
PA11-98R		98					23
PA11-231		231					32
PA11-122D		122				D/A	22
PA11-231D		231					32
PA11-460D		460					44

DESCRIPTION

- Air Hydraulic Turbo speed operation offering high flow at high pressure.
- Hydraulic port swivels for easy connection.
- Air pressure range 40-170 PSI.
- Pressure relief valve for overload protection.

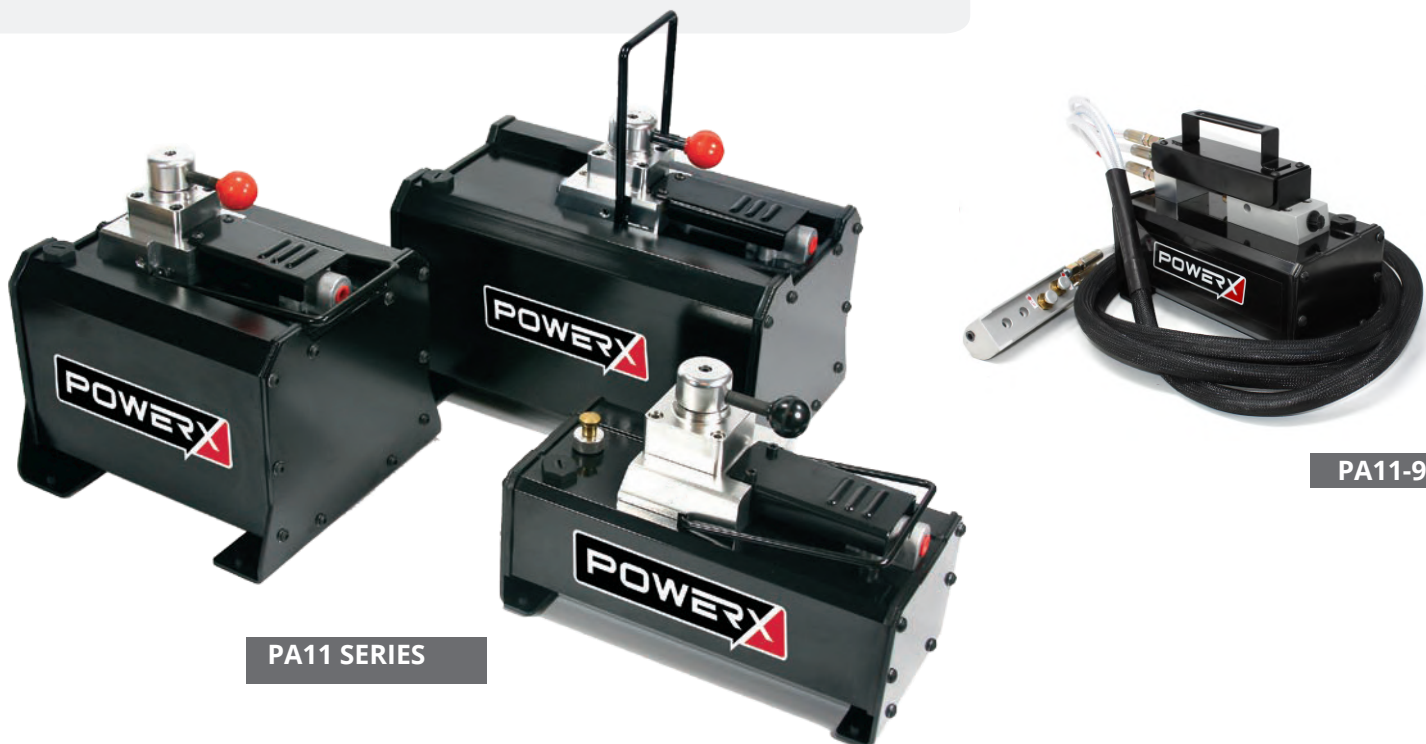

PA11 SERIES

PA11-98R

TOE JACKS

Part Number	Capacity (tons)	Stroke (in)	Min. Height (in)	Max. Handle Effort (lbs.)	Weight (lbs.)
JT2-5	2	4.73	0.67	76.4	18
JT5-5	5	4.73	1.06	49.5	49
JT10-6	10	5.71	1.22	56.2	78



DESCRIPTION

- Low toe height to fit in tight spaces.
- 5T and 10T models with swivel sockets allow access in close quarters.
- Self contained for versatility.
- Low handle operation for ease of operation.
- For structural moving, rigging, machine lifting, forklift service and more.

BOTTLE JACKS

Part Number	Capacity (tons)	Stroke (in)	Min - Max Height (in)	Ext Screw Length (in)	Saddle Dia. (in)	Weight (lbs.)
JB5-5	5	4.66	7.88 - 15.25	2.75	1.13	7.9
JBL12-4	12	3.44	6.97 - 13.38	3.00	1.67	14
JB12-6	12	5.75	9.50 - 18.38	3.13	1.50	17
JBL20-4	20	3.31	7.22 - 12.00	1.50	2.06	22
JB20-7	20	6.22	10.67 - 16.88	-	2.38	27
JB30-7	30	6.25	11.06 - 17.31	-	2.41	40

DESCRIPTION

- Heavy steel construction, cylinder, oil reservoir and pump housing are welded to the hydraulic base.
- Chrome plated rod. Pump piston is heat treated & hard chrome plated.
- Equipped with an internal load limiting device. The automatic by-pass system prevents ram over-travel.
- Operates in vertical, angled, or horizontal position.
- Load tested to 150% capacity, easy to repair.



FLAT BODY CYLINDER




Part Number	Capacity (tons)	Stroke (in)	Oil Capacity (in ³)	(A) Collapsed Height (in)	(B) Extended Height (in)	(D) Outside Dia. (in)
CF5	5	0.25	0.25	1.28	1.53	2.31 x 1.63
CF10	10	0.44	0.98	1.69	2.13	3.25 x 2.19
CF20	20	0.44	1.95	2.03	2.47	4.00 x 3.00
CF30	30	0.50	3.25	2.31	2.81	4.63 x 3.75
CF50	50	0.63	6.07	2.63	3.25	5.50 x 4.50
CF75	75	0.63	10.03	3.13	3.75	6.50 x 5.50
CF100	100	0.63	12.39	3.38	4.00	7.00 x 6.00
CF150	150	0.67	19.34	3.94	4.61	8.86 x 7.68

Part Number	(E) Rod Diameter (in.)	Cylinder Bore (in)	Effective Area (in ²)	(H) Base to Adv. Port (in)	Rod to Base (in)	(M) Rod to Mount Hole (in)	(G) Hole Dia. (in)	Weight (lbs.)
CF5	1.00	1.13	0.99	0.63	0.81	0.88	0.20	3.0
CF10	1.50	1.69	2.24	0.75	1.09	1.34	0.28	4.0
CF20	2.00	2.38	4.43	0.75	1.56	1.56	0.40	7.0
CF30	2.50	2.88	6.51	0.75	1.88	1.75	0.40	10
CF50	2.75	3.50	9.63	0.75	2.25	2.13	0.47	15
CF75	3.25	4.50	15.92	0.75	2.75	2.63	0.53	25
CF100	3.63	5.00	19.67	0.75	3.00	2.94	0.53	32
CF150	6.50	6.25	30.70	0.91	3.38	3.35	0.53	58

DESCRIPTION

- Low profile, high tonnage steel construction.
- Single acting heavy duty spring return.
- Grooved rod end.
- 3/8" NPTF port with high flow coupler and dust cap.
- Durable exterior finish and ANSI B30.1 compliant.
- Mounting holes permit easy fixturing.

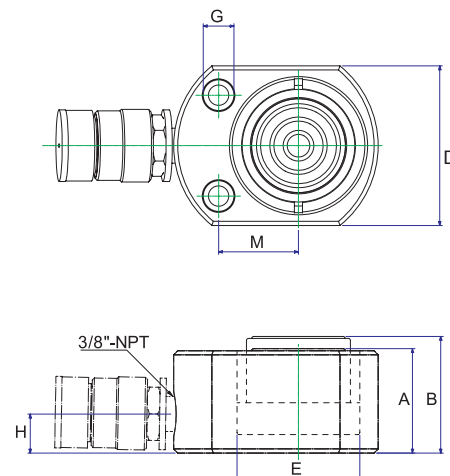


Center Hole Cylinders

Part Number	Capacity (tons)	Stroke (In.)	Oil Capacity (In ³)	(A) Collapsed Height	(Y) Center Hole Dia.	(B) Extended Height	(W) Outside Dia. (in.)	Outside Collar Thread	Inside Collar Thread	(J) Rod Dia. (In.)
CH12-0	12	0.31	0.9	2.36	0.77	2.68	2.87	2-3/4"-16"	3/4"-16"	2.09
CH12-2	12	2	4.8	4.72	0.77	6.38	2.87	2-3/4"-16"	3/4"-16"	2.09
CH12-3	12	3	8.7	7.24	0.77	10.24	2.87	2-3/4"-16"	3/4"-16"	2.09
CH20-2	20	2	8.9	6.38	1.06	8.35	3.88	3-7/8"-12"	1-9/16"-16"	2.13
CH20-6	20	6	10.3	12.10	1.06	18.20	3.88	3-7/8"-12"	1-9/16"-16"	2.13
CH30-2	30	2	25.3	7.01	1.31	9.53	4.50	4-1/2"-12"	1-13/16"-16"	2.50
CH30-6	30	6	45.3	12.99	1.31	19.11	4.50	4-1/2"-12"	1-13/16"-16"	2.50
CH60-3	60	3	41.4	9.75	2.12	12.74	6.25	6-1/4"-12"	2-3/4"-16"	3.50
CH60-6	60	6	83.4	12.74	2.12	18.77	6.25	6-1/4"-12"	2-3/4"-16"	3.50
CH100-3	100	3	66.3	10.00	3.11	13.00	8.38	8-3/8"-12"	4"-16"	5.00
CH100-6	100	6	132.8	23.42	3.11	29.33	8.38	8-3/8"-12"	4"-16"	5.00

DESCRIPTION

- Single acting, steel construction, heavy duty spring return.
- Threaded collar, threaded rod & base mounting holes for easy fixturing.
- 3/8" NPTF port with high flow coupler and dust cap.
- Hollow chrome plated rod design allows for both, pull and push forces.
- Durable exterior finish and ANSI B30.1 compliant.

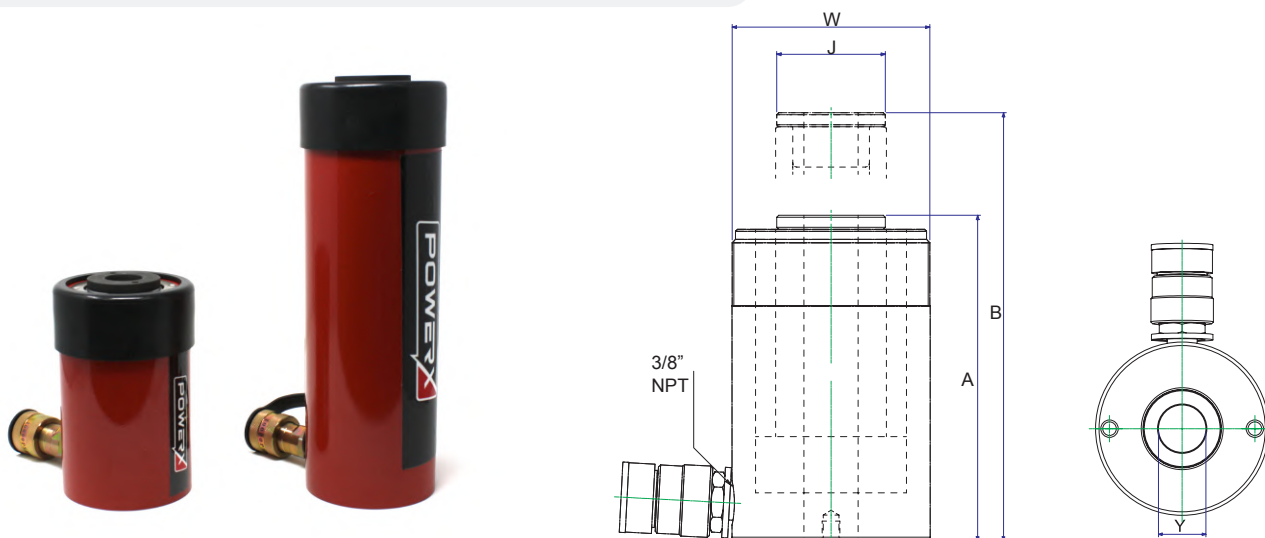




SINGLE ACTING CYLINDERS

Part Number	Capacity (tons)	Stroke (in)	Oil Capacity (in ³)	(A) Collapsed Height (in)	(B) Extended Height (in)	(C) Outside Dia. (in)	Collar Thread
C5-1	5	1	0.99	4.34	5.34	1.50	1-1/2-16
C5-3		3	2.98	6.50	9.50		
C5-5		5	4.97	8.50	13.55		
C5-7		7	6.96	10.75	17.80		
C5-9		9	9.07	12.75	21.93		
C10-1	10	1	2.24	3.62	4.62	2.25	2-1/4"-14
C10-2		2	4.75	4.86	6.91		
C10-4		4	9.23	6.85	10.88		
C10-6		6	13.70	9.86	15.76		
C10-8		8	17.89	11.85	19.80		
C10-10		10	22.65	13.85	23.80		
C10-12		12	26.81	15.87	27.83		
C10-14	14	31.40	17.72	31.75			
C15-2	15	2	6.28	5.88	7.88	2.75	2-3/4"-12
C15-4		4	12.57	7.88	11.88		
C15-6		6	18.85	10.69	16.54		
C15-8		8	25.13	12.69	20.55		
C15-10		10	31.42	14.69	24.59		
C15-12		12	37.70	16.69	28.69		
C15-14	14	43.98	18.69	32.69			
C25-1	25	1	5.25	5.40	6.44	3.35	3-5/16"-12
C25-2		2	10.31	6.83	8.84		
C25-4		4	20.63	8.78	12.74		
C25-6		6	32.23	10.79	16.95		
C25-8		8	42.55	12.80	20.77		
C25-10		10	52.86	14.80	24.78		
C25-12		12	63.18	16.73	28.98		
C25-14	14	73.49	18.74	33.00			
C55-2	55	2	22.09	6.94	8.94	5.00	5"-12
C55-4		4	44.18	8.96	12.94		
C55-6		6	69.00	11.13	17.38		
C55-10		10	110.82	15.10	25.15		
C55-13		13	146.34	18.13	31.38		
C100-6	100	6	136.67	14.06	20.69	6.99	6-7/8"-12
C100-10		10	211.45	17.69	27.94		

DESCRIPTION

- Single acting with heavy duty spring return.
- Steel construction and chrome plated rod.
- Collar threads with protective cover & base mounting holes.
- 3/8" NPTF port with high flow coupler and dust cap.
- Durable exterior finish and ANSI B30.1 compliant.

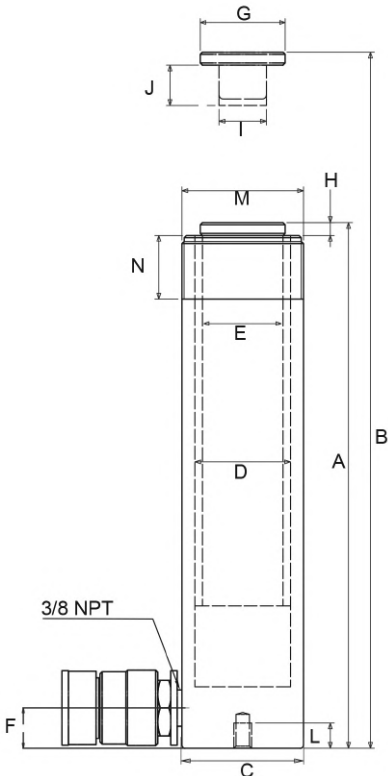

Single Acting Cylinders

(N) Thread Length (in)	(E) Rod Dia. (in)	(D) Bore Dia. (in)	Effective Area (in ²)	(F) Base to Advance Port	(G) Saddle Dia. (in)	(I) Rod Internal Thread	(J) Rod Thread Length (in)	Bolt Circle (in)	Thread	Thread Depth (in)	Weight (lbs.)
1.13	1.00	1.13	0.99	0.75	1.00	3/4"-16	0.56	1.00	1/4-20	0.56	2.3
											3.3
											4.1
											5.3
											6.1
1.13	1.50	1.69	2.24	0.75	1.50	1"-8	0.75	1.56	5/16"-18	0.50	3.9
											4.9
											6.5
											9.2
											11
											13
											15
17											
1.19	1.63	2.00	3.14	.98	1.57	1"-8	1.00	1.88	3/8"-16	0.50	9.1
											11
											15
											18
											21
											23
1.94	2.25	2.56	5.16	1.00	2.00	1-1/2"-16	1.00	2.31	1/2"-13	0.75	12
											14
											18
											22
											26
											31
											35
1.75	3.13	3.75	11.04	1.38	3.15	-	-	3.75	1/2"-13	0.75	39
											33
											45
											65
											83
1.75	4.13	5.13	20.63	1.57	4.13	-	-	5.50	3/4"-10	1.00	130
											160

AUTOMOTIVE CYLINDERS

Part Number	Capacity (tons)	Stroke (in)	Oil Capacity (in ³)	Collapsed Height (in)	(A) Extended Height (in)	(G) Outside Dia. (in)	Collar Thread	(D) Thread Length (in)
CA5-5	5	5	4.97	9.28	14.28	1.5	1-1/2"-16	1.13
CA10-6	10	6	13.70	9.75	15.88	2.25	2-1/4"-14	1.13
CA10-10	10	10	22.65	13.75	23.88	2.25	2-1/4"-14	1.13
CA25-6	25	6	32.23	11.50	17.5	3.35	3-5/16"-12	1.94
CA25-10	25	10	52.86	15.5	25.5	3.35	3-5/16"-12	1.94
CA25-14	25	14	73.49	19.8	33.8	3.35	3-5/16"-12	1.94

AUTOMOTIVE CYLINDERS continued

Part Number	Rod Dia. (in)	(H) Bore Dia. (in)	Effective Area (in ²)	Base Hole Thread	Rod End Internal Thread	Weight (lbs.)
CA5-5	1.00	1.13	0.99	3/4"-14 NPT	3/4"-16	4.1
CA10-6	1.50	1.69	2.24	1-1/4"-11-1/2 NPT	1"-8	9.8
CA10-10	1.50	1.69	2.24	1-1/4"-11-1/2 NPT	1"-8	14
CA25-6	2.25	2.56	5.16	2"-11-1/2 NPT	1-1/2"-16	22
CA25-10	2.25	2.56	5.16	2"-11-1/2 NPT	1-1/2"-16	31
CA25-14	2.25	2.56	5.16	2"-11-1/2 NPT	1-1/2"-16	39

DESCRIPTION

- Single acting with heavy duty spring return.
- Collar and base threads accommodate accessories and adapters.
- 3/8" NPTF port with high flow coupler and dust cap.
- Durable exterior finish and ANSI B30.1 compliant.
- Rod end saddle, available as an option.




LOW PROFILE (SHORT) CYLINDERS

Part Number	Capacity (tons)	Stroke (in)	Oil Capacity (in ³)	(A) Collapsed Height (in)	(B) Extended Height (in)	(D) Outside Dia. (in)	(F) Rod Dia. (in)
CL10-1	10	1.50	3.35	3.50	4.97	2.75	1.50
CL20-2	20	1.75	7.77	3.88	5.63	3.63	2.00
CL30-2	30	2.44	15.85	4.63	7.06	4.00	2.50
CL50-2	50	2.38	22.91	5.02	7.19	4.88	2.75
CL100-2	100	2.50	44.25	5.56	7.81	6.50	3.63

LOW PROFILE (SHORT) CYLINDERS continued

Part Number	(O) Bore Dia. (in)	Effective Area (in ²)	Bolt Circle (in)	Thread	Thread Depth (in)	Weight (lbs.)
Saddle Mounting Holes						
CL10-1	1.69	2.43	1.03	M4	0.32	9
CL20-2	2.38	4.44	0.94	M5	0.32	11
CL30-2	2.88	6.50	1.42	M5	0.38	15
CL50-2	3.50	9.62	1.56	M6	0.38	24
CL100-2	5.00	19.67	2.19	M8	0.40	50

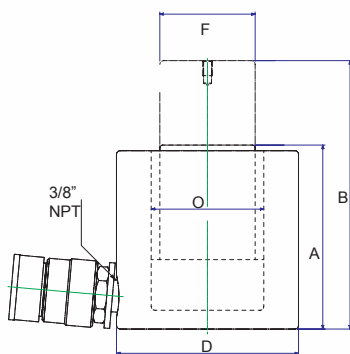

DESCRIPTION

- Single acting, steel construction, heavy duty spring return.
- Angled coupler on CL10, CL20 and CL30 allows for more compact, low profile design.
- Collar threads with protective cover & base mounting holes.
- 3/8" NPTF port with high flow couple and dust cap.
- Durable exterior finish and ANSI 830.1 compliant.



DOUBLE ACTING CYLINDERS

Part Number	Push Capacity (tons)	Pull Capacity (tons)	Stroke (in)	Oil Capacity Push (in3)	Oil Capacity Pull (in3)	(A) Collapsed Height (in)	(B) Extended Height (in)	(D) Outside Diameter (in)
CD10-6	10	4	6.00	13.50	4.60	12.10	18.10	2.88
CD10-10	10	4	10.00	22.33	8.00	16.13	26.13	2.88
CD10-12	10	4	12.00	26.80	9.00	18.00	30.00	2.88
CD25-6	24.5	7	6.25	30.68	8.42	12.47	18.72	4.00
CD30-8	30	15	8.25	53.67	25.00	15.25	23.50	4.00
CD30-14	30	15	14.50	92.70	43.00	21.63	36.13	4.00
CD55-6	55	17	6.13	67.77	21.00	13.06	19.19	5.00
CD55-13	55	17	13.13	145.17	44.00	20.06	33.19	5.00
CD80-6	80	24	6.13	97.58	29.00	13.69	19.81	5.75
CD80-13	80	24	13.13	209.00	64.00	20.69	33.81	5.75
CD100-6	100	48	6.63	136.93	63.00	14.06	20.69	7.00
CD100-13	100	48	13.00	271.17	126.00	20.63	33.75	7.00

DESCRIPTION

- Double acting, allows for both, push and pull forces.
- Ability to control cylinder speed in both extension and retraction. (additional components required).
- Steel construction and chrome plated rod.
- 10T to 100T capacity with 6" to 14-1/2" stroke.
- Collar threads for easy fixturing.
- 3/8" NPTF port with high flow coupler and dust cap.
- Durable exterior finish and ANSI B30.1 compliant.




Double Acting Cylinders

(X) Collar Thread (in)	(E) Bore Diameter (in)	(J) Rod Diameter (in)	Effective Area Push (in ²)	Effective Area Pull (in ²)	(H) Base to Advance Port (in)	Bolt Circle (in)	Thread	Thread Depth (in)	Weight (lbs.)
						Base Mounting Holes			
2-1/4"-14	1.69	1.38	2.23	0.80	1.44	-	-	-	20
2-1/4"-14	1.69	1.38	2.23	0.80	1.44	-	-	-	28
2-1/4"-14	1.69	1.38	2.23	0.80	1.44	-	-	-	31
4"-12	2.50	2.13	4.91	1.35	1.00	-	-	-	40
3-5/16"-12	2.88	2.13	6.51	3.00	1.44	-	-	-	40
3-5/16"-12	2.88	2.13	6.51	3.00	1.56	-	-	-	64
5"-12	3.75	3.13	11.06	3.40	1.13	-	-	-	67
5"-12	3.75	3.13	11.06	3.40	1.13	-	-	-	115
5-3/4"-12	4.50	3.75	15.92	4.90	1.19	-	-	-	92
5-3/4"-12	4.50	3.75	15.92	4.90	1.19	-	-	-	150
6-7/8"-12	5.13	3.75	20.65	9.60	1.50	5.5	3/4"-10	1	135
6-7/8"-12	5.13	3.75	20.65	9.60	1.50	5.5	3/4"-10	1	205



For 150 ton cylinders and up, see page 28

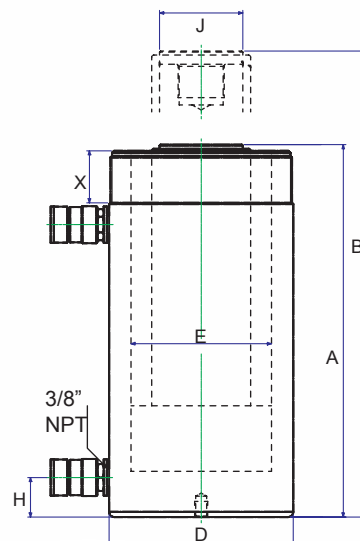

HIGH TONNAGE DOUBLE ACTING CYLINDERS

Part Number	Push Capacity (tons)	Stroke (in)	Oil Capacity (in3)	Retracted Height (in)
CD150-2	150	2	60	7.75
CD150-6	150	6	182	11.75
CD150-12	150	12	360	17.75
CD200-2	200	2	81	8.50
CD200-6	200	6	244	12.50
CD200-8	200	8	323	14.50
CD200-12	200	12	487	18.50
CD250-6	250	6	333	13.25
CD250-18	250	12	667	19.25
CD300-2	300	2	140	12.50
CD300-6	300	6	418	16.50
CD300-12	300	12	836	22.50
CD400-6	400	6	513	18.75
CD400-12	400	12	1043	24.75
CD500-2	500	2	223	16.75
CD500-6	500	6	669	20.75
CD500-12	500	12	1338	26.75

HIGH TONNAGE SINGLE ACTING CYLINDERS


Part Number	Capacity (tons)	Stroke (in)	Oil Capacity (in3)	Retracted Height (in)
C150-6	150	6	182.00	11.65
C150-10	150	10	303	15.65
C150-12	150	12	364	17.65
C200-6	200	6	244	12.50
C200-12	200	12	487	18.50
C250-2	250	2	112	9.50
C250-6	250	6	336	13.50
C250-12	250	12	671	19.50
C300-2	300	2	140	12.50
C300-6	300	6	418	16.50
C300-12	300	12	836	22.50
C400-2	400	2	171	14.75
C400-6	400	6	513	18.75
C400-12	400	12	1026	24.75
C500-2	500	2	223	16.50
C500-6	500	6	669	20.50
C500-12	500	12	1338	26.50

SINGLE ACTING ALUMINUM CYLINDERS

Part Number	Capacity (tons)	Stroke (in)	Oil Capacity (in3)	Retracted Height (in)
CAL20-2	20	2	9.39	6.38
CAL20-4	20	4	18.24	8.39
CAL20-6	20	6	27.05	10.37
CAL30-2	30	2	14.52	7.38
CAL30-4	30	4	28.24	9.37
CAL30-6	30	6	41.97	11.38
CAL55-2	55	2	22.39	6.73
CAL55-4	55	4	45.50	8.74
CAL55-6	55	6	67.71	10.75
CAL100-2	100	2	43.80	7.76
CAL100-6	100	6	129.08	11.75



Hydraulic Pullers

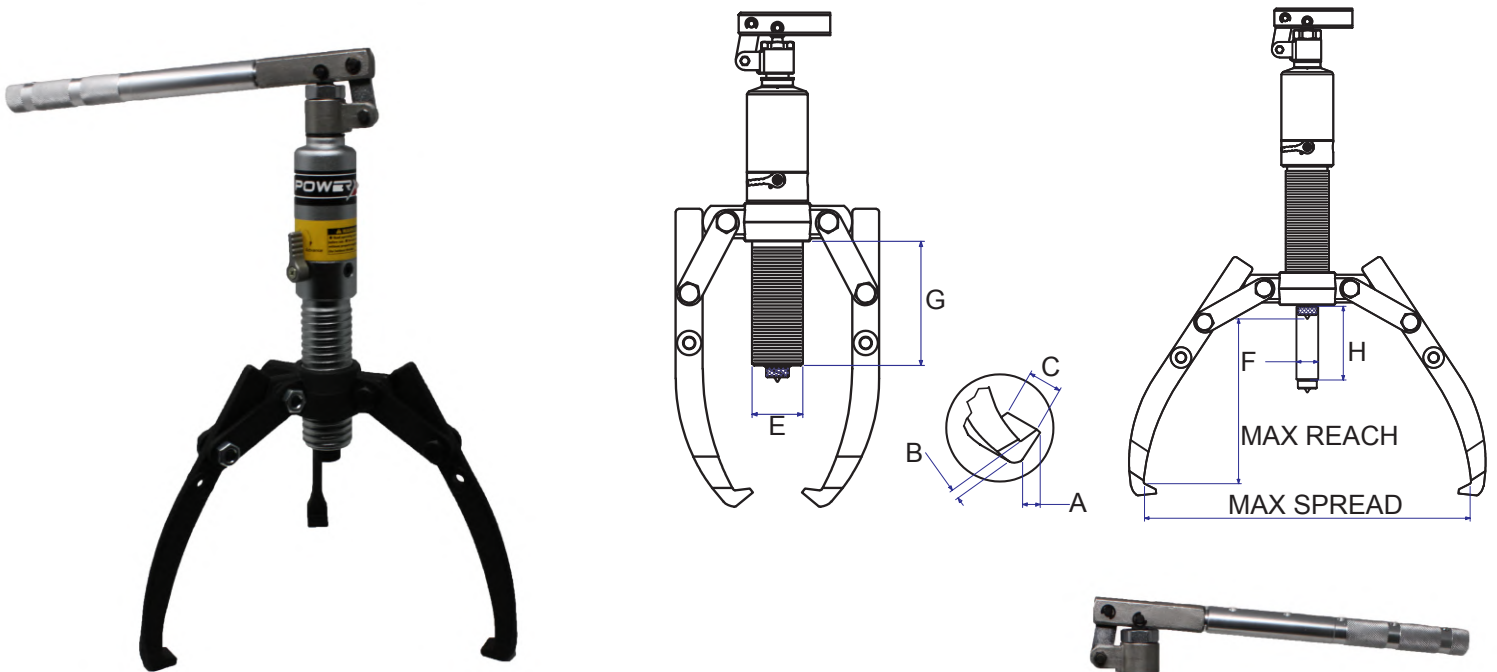

DESCRIPTION

- Ideal for pulling a wide variety of parts, including bearings, bushings, wheels, gears and pulleys.
- The self-contained hydraulic pump saves space. A separate hose and pump are not needed to operate.
- Includes a 2 and 3 jaw puller, cross head puller, bearing attachment and all associated hardware.
- Safety release valve to prevent overloading.
- Five position adjustable handle allows for better positioning in tight areas.
- Easy to carry blow molded case for component storage.



HYDRAULIC PULLER KITS

Part Number	Capacity (Ton)	Reach (Max. in.)	Spread (Max. in.)	Stroke (in.) H	Pump Tip (in.)			Jaw Tip (in.)			Weight (lbs.)
					E	F	G	A	B	C	
HPK4	4	7.28	10.04	2.36	1.65	0.87	3.31	0.43	0.24	0.87	9.9
HPK8	8	9.05	13.78	3.35	1.97	0.98	4.80	0.43	0.39	0.98	25.4
HPK12	12	10.63	14.76	3.35	2.36	1.10	4.65	0.55	0.39	1.14	30.9
HPK20	20	14.17	20.47	4.37	3.15	1.57	6.34	0.79	1.06	1.30	44.1
HPK30	30	14.17	21.65	4.37	3.86	1.97	6.10	0.79	1.06	1.50	66.1



PORTABLE POWER PACKS

DESCRIPTION

- Snap together design for fast and easy assembly and disassembly.
- Tool components forged for rigidity and durability.
- 10,000 psi single speed pump with automatic overload system.
- Easy to carry blow molded case for components storage.
- Available in both 4 ton and 10 ton capacity kits.

Each MRK4 4 Ton Power Pack Contains:

- (1) Hydraulic Pump
- (1) 6 Foot Hose
- (1) 4 Ton 4" Stroke Cylinder
- (1) 1/2 Ton Spreader
- (4) Extension Tubes
- (1) Male Connector
- (1) Flat Base
- (1) 90 Degree "V" Base
- (1) Wedge Head
- (1) Spreader Plunger Toe
- (1) Spreader Ram Toe
- (1) Flex Head
- (1) Serrated Saddle
- (1) Blow Molded Case

Each MRK10 10 Ton Power Pack Contains:

- (1) Hydraulic Pump
- (1) 6 Foot Hose
- (1) 10 Ton 6" Stroke Cylinder
- (1) 1/2 Ton Spreader
- (4) Extension Tubes
- (1) Male Connector
- (1) Flat Base
- (1) 90 Degree "V" Base
- (1) Wedge Head
- (1) Spreader Plunger Toe
- (1) Spreader Ram Toe
- (1) Flex Head
- (1) Serrated Saddle
- (1) Blow Molded Case

HYDRAULIC SPREADERS

Part Number	Spread (in.)		Capacity (Tons)	Weight (lbs.)
	Min. (A)	Max. (B)		
PXFS15-FL	.24	.63	15	7.3
PXFS15-ST	.24	.63	15	7.3
PXFS25-FL	.31	1.0	25	17
PXHS-1000	1.3	11.9	1	25
PXHS-0750	1.0	3.0	.75	5



PXFS15-FL


PXFS15-ST

PXFS25-FL



PXHS-1000

PXHS-0750

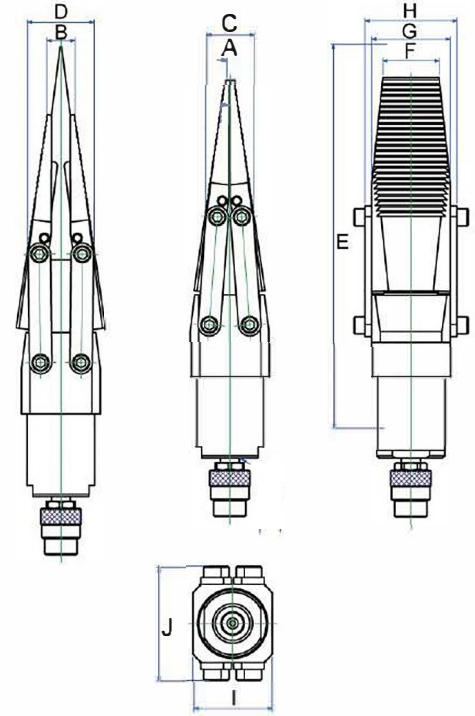

DESCRIPTION

- Compact design will optimize use in low clearance applications
- Lightweight for increased portability
- Manufactured from high quality hardened steel

Dimensions


Part Number	C (In.)	D (In.)	E (In.)	F (In.)	G (In.)	H (In.)	I (In.)	J (In.)
PXFS15-FL	1.4	1.8	9.1	1.2	1.8	2.2	2.5	2.5
PXFS15-ST	1.4	1.8	9.1	1.2	1.8	2.2	2.5	2.5
PXFS25-FL	1.7	2.3	13.5	2.0	2.8	3.2	2.8	4.0
PXHS-1000	6.6	6.6	19.2	2.4	2.4	2.4	2.4	6.6
PXHS-0750	1.0	2.1	8.8	2.1	2.1	2.1	2.1	2.1

NUT SPLITTERS

Part Number	Hexagon Nut Range (in.)	Bolt Range (in)	Capacity (Ton)	Oil Capacity (in ³)	Dimensions						Weight (lbs.)
					A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	
PXNS1924	.75 - .94	.44 - .56	10	1.22	2.36	6.58	0.39	0.98	1.57	2.68	4.6
PXNS2432	.94 - 1.13	.56 - .75	15	3.66	2.76	7.01	0.51	1.18	2.05	2.99	6.8
PXNS3241	1.13 - 1.56	.75 - 1.00	20	4.88	3.15	8.90	0.59	1.42	2.56	3.66	9.3

DESCRIPTION

- Compact design for use in confined spaces.
- All models feature a rugged one-piece cutting frame coupled to a heavy-duty hydraulic cylinder.
- Specially designed "tool steel" cutter blade cuts the nut with accuracy and precision.
- Unique angled head design to keep contact with the nut during operation.
- Angled cutter blade with radius produces greater resistance for cutting and splitting.
- Our nut splitters include a spare blade, a spare set screw and the wrench used to secure the chisel.

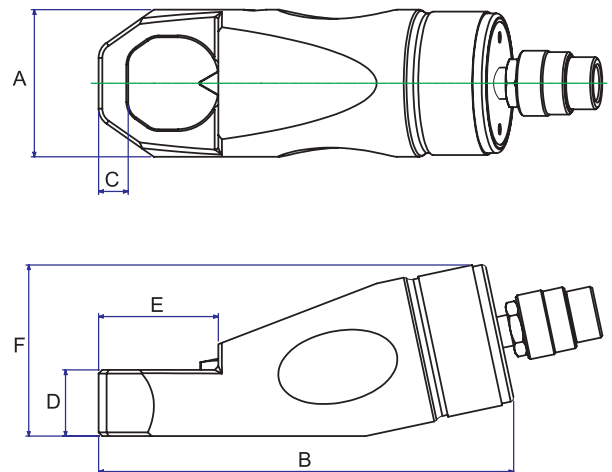


Recommended Pump and Accessories




Part Number: VNO-33

- Used for normal flow control
- Can be used as a shut off valve
- Maximum working pressure : 10,000 psi / 700 Bar
- 1/4 NPT needle valve available on request

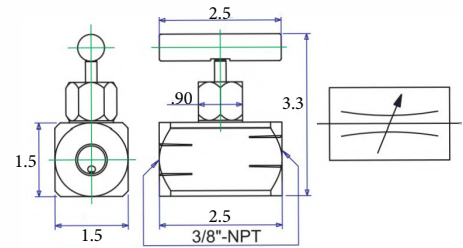


Part Number VNC-33

- Used for precise metering of flow
- Bypass flow control in return direction
- Temporary shut off only
- Maximum working pressure : 10,000 psi / 700 Bar

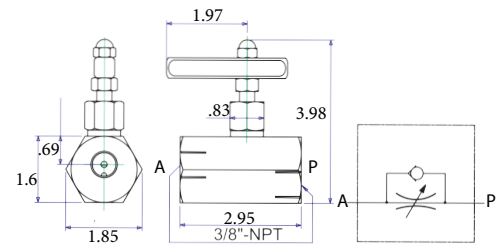


Part Number: VNR-33

- Needle valve style load holding
- Bypass flow control in return direction
- Built in pressure relief valve
- Maximum working pressure : 10,000 psi / 700 Bar

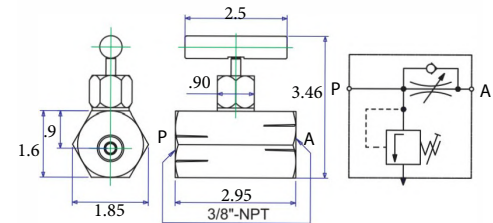


Part Number: VRO-33

- Inline pressure relief valve
- Adjustable from 100 - 10,000 psi
- Built in pressure relief valve
- Maximum working pressure : 10,000 psi / 700 Bar

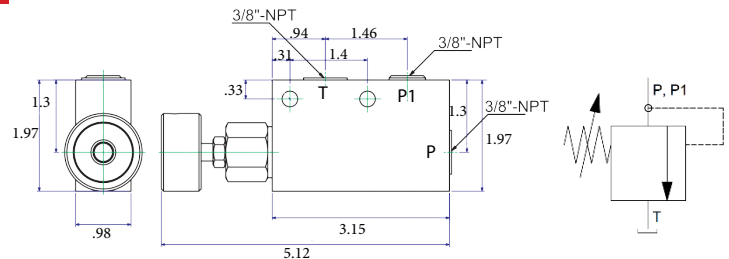


Part Number: VCP-333

- Inline pilot operated check valve
- 3/8 NPT female threads
- Maximum working pressure : 10,000 psi / 700 Bar

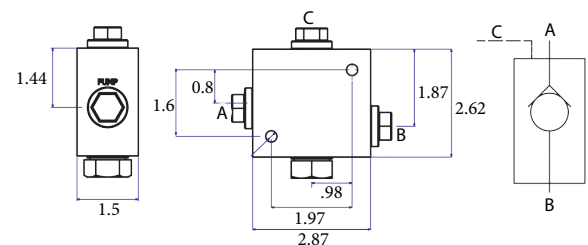


Part Number: VCO-33

- Inline check valve
- 3/8 NPT male threads
- Maximum working pressure : 10,000 psi / 700 Bar

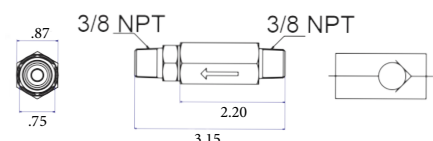


Part Number: FRM-3-7

- 7 X 3/8 NPT manifold block.
- Ideal as return manifold or when gauges are not required.
- Maximum working pressure : 10,000 psi / 700 Bar.

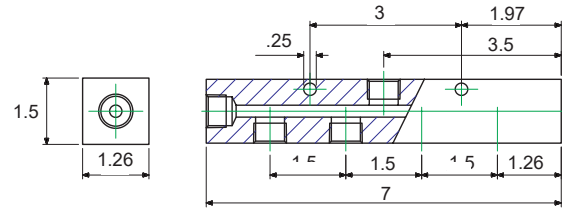


Part Number: FRM-3-14

- 7 X 3/8 NPT manifold block.
- Larger gap between ports ideal for use with gauges.
- Maximum working pressure : 10,000 psi / 700 Bar.

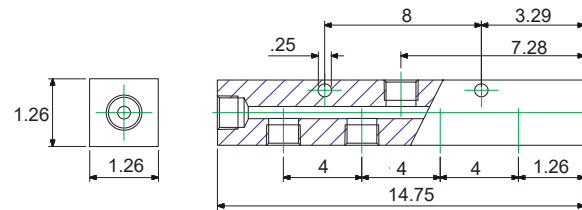


Part Number: FRM-6

- 6 X 3/8 NPT manifold block.
- Hex design to allow for multiple angle connection.
- Maximum working pressure : 10,000 psi / 700 Bar.

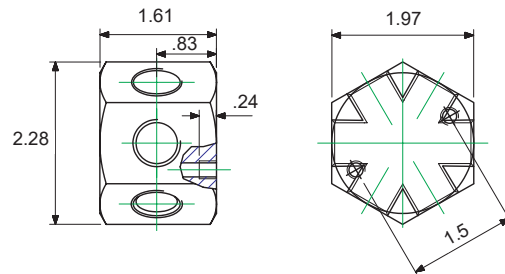


Part Number: VMN-2-3

- 3 X 3/8 NPT ports.
- Built in needle valves for 2 outlet flow control.
- Maximum working pressure : 10,000 psi / 700 Bar.

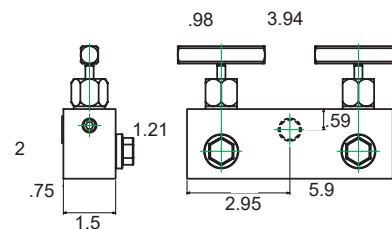




Part Number: VMN-4-3

- 5 X 3/8 NPT manifold block.
- Built in needle valves for 4 outlet flow control.
- Maximum working pressure : 10,000 psi / 700 Bar.

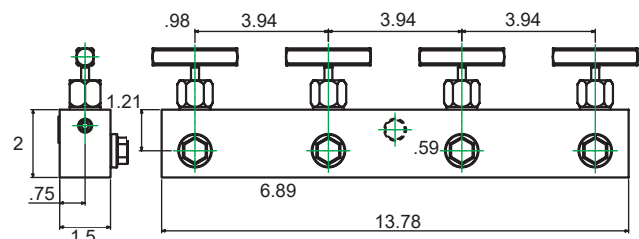






STRAIGHT CONNECTORS

Model	(A)		(B)	
	Thread	Type	Thread	Type
FNO-33	3/8 NPT	Male	3/8 NPT	Male
FNO-22	1/4 NPT	Male	1/4 NPT	Male
FNO-23	1/4 NPT	Male	3/8 NPT	Male
FRO-23	1/4 NPT	Male	3/8 NPT	Female
FRO-32	3/8 NPT	Male	1/4 NPT	Female
FCO-33	3/8 NPT	Female	3/8 NPT	Female
FCO-22	1/4 NPT	Female	1/4 NPT	Female
FCO-23	1/4 NPT	Female	3/8 NPT	Female



ELBOW AND TEE CONNECTORS

Model	(A)		(B)		(C)	
	Thread	Type	Thread	Type	Thread	Type
FEE-33	3/8 NPT	Male	3/8 NPT	Male	-	-
FES-33	3/8 NPT	Male	3/8 NPT	Female	-	-
FEO-33	3/8 NPT	Female	3/8 NPT	Female	-	-
FTR-333	3/8 NPT	Male	3/8 NPT	Female	3/8 NPT	Female
FTO-222	1/4 NPT	Female	1/4 NPT	Female	1/4 NPT	Female
FTO-333	3/8 NPT	Female	3/8 NPT	Female	3/8 NPT	Female



PRESSURE GAUGES

Part Number	Face Diameter (in)	Port Size, Mount & Fill	Pressure Range (psi)	Pressure Range (bar)
GV25D	2.5	1/4" NPT, lower & no fill	0 - 10,000	0 - 700
GV40D	4			
GV25L	2.5	1/4" NPT, lower & liq. filled	0 - 25,000	0 - 1500
GV40L	4			
GV40D-25	4	Cone (1/4-28 LH), lower & no fill	0 - 25,000	0 - 1500
GV40D-40	4		0 - 40,000	0 - 2800
GV40L-25	4	Cone (1/4-28 LH), lower & liq. filled	0 - 25,000	0 - 1500
GV40L-40	4		0 - 40,000	0 - 2800



HYDRAULIC HOSES

Part Number	Diameter (in)	Length (ft)	Operating Pressure (psi)
HA25-3	1/4"	3	10,000
HA25-6	1/4"	6	
HA25-10	1/4"	10	
HA25-20	1/4"	20	
HA38-4	3/8"	4	
HA38-6	3/8"	6	
HA38-10	3/8"	10	
HA38-20	3/8"	20	
HA38-50	3/8"	50	



DESCRIPTION

- Hoses are MSHA approved.
- Neoprene cover is resistant to abrasion, oil, and weather.
- Temperature range of -40° to +250°F.



HIGH FLOW COUPLERS

Part Number	Size	Operating Pressure (psi)	Type
HFC-F-375	3/8"	10,000	Female
HFC-M-375	3/8"	10,000	Male
HFC-375	3/8"	10,000	Set

DESCRIPTION

- Designed for higher flow capacities and lower pressure losses than standard couplers.
- Threaded union design allows for fast component changes.
- Couplers permit safe separation at zero psi, with minimal oil loss.

CONE FITTING "T" ASSEMBLY

Part Number	Ports	Length (in.)
PX003130	3/4-16 M x 1/4-28 LH FM x 3/8-24 LH FM	5.8



DESCRIPTION

- Designed for ultra high pressure applications, up to 40,000 psi.

GAUGE ADAPTOR

Part Number	Overall Size (in.)	Port Sizes (NPT)
FGA-332-S26	2.5 x 1 x 1	3/8", 3/8", 1/4"
FGA-332-S45	4.5 x 1 x 1	3/8", 3/8", 1/4"
FGA-332-H30	3 x 1 x 1	3/8", 3/8", 1/4"



DESCRIPTION

- Designed for high pressure applications, up to 10,000 psi.
- Stainless steel construction.

PREMIUM HYDRAULIC FLUID

Part Number	UoM	Package	Weight (lbs)
PL-1	Bottle	1 gallon	8
PL-4	Case	4 - 1 gallon bottles	30

DESCRIPTION

- Premium hydraulic fluid made from virgin oil stock.
- Resists thermal breakdown.
- Superior anti-wear protections.
- Designed to meet the most stringent requirements of all major manufactures of hydraulic equipment.




**Accessory Set for Metric & Inch (Class B - F)****Accessory Set for Inch (Class G - GG)****FEATURES**

- Dismantle or Install the tapered roller bearings easily and efficiently.
- Specially designed for the major bearing manufacturers.
- The simple, efficient and easy operation provided with the pulling force - 100 Ton.
- Single Unit with portable design for easy, convenient positioning and saving storage space.

Universal railroad axle journal roller bearing push puller

Now, we are able to provide the basic tool in most wheel shops for dismantling and installing the axlejournal roller bearings. With this equipment and know-how, you can save the maximum of time and effort on maintenance. From class B through GG, each unit service a full line of bearings with rotating end caps. Simply remove the end caps, slip the pulling shoe between the bearings and the wheel, start the pump, and the bearing will be removed within seconds under the pulling force of 100 Ton. The pulling shoe and installing tube ensure the most convenient and fast installation. The 100-ton hydraulic cylinder works under 10,000 psi.

100 Ton Push Puller (Railroad Version)

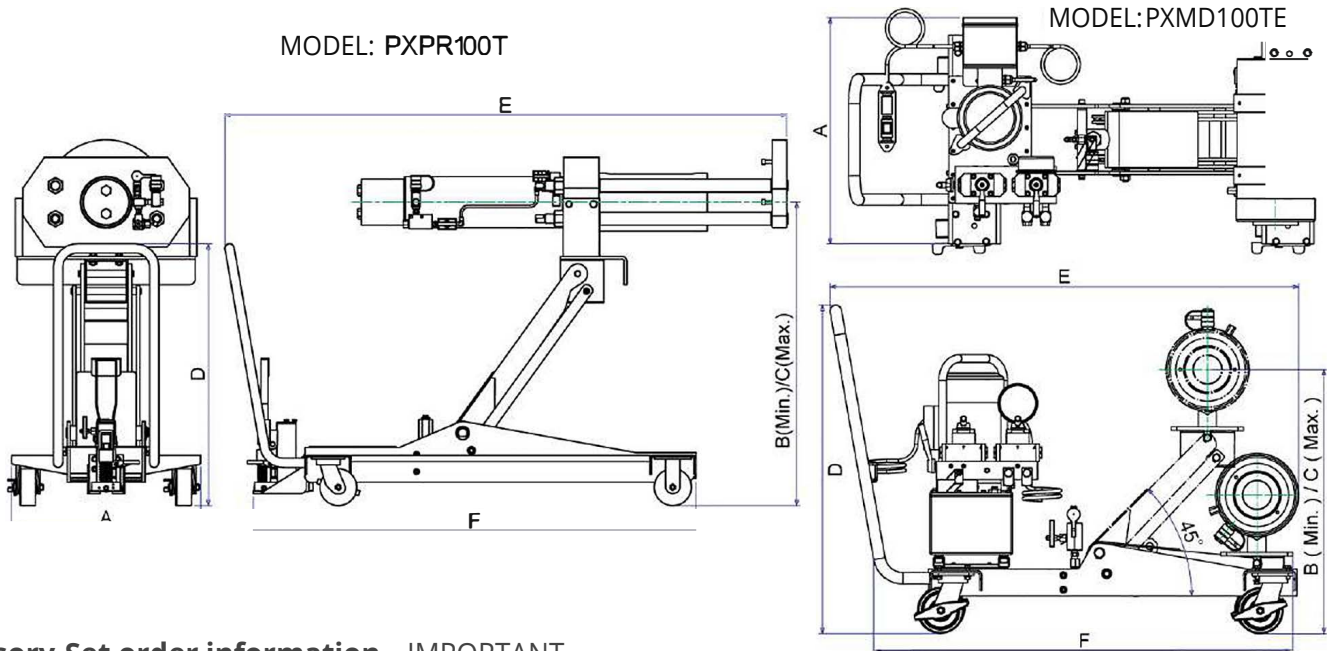

Accessory Set order information - IMPORTANT...

This accessory chart applies only to AAR configuration for vehicle maintenance applications.

Class & Size of bearing assembly - TBU & SP "Metric Accessories "

Accessory Description	#120	#130	#140	#150
Pulling Shoe Insert Adapter	PXF0436	PXF0437	PXF0438	PXF0439
Guide Tube & Cap Screw Assembly	PXE2601	PXE2602	PXE2603	PXE2604
Cap Screw	PXH0421	PXH0421	PXH0421	PXH0422
Guide Tube Adapter	PXB1248	PXB1248	PXB1248	PXB1248
Installing Tube Adapter Ring	PXD1031	PXD1032	PXD1033	PXD1034

Class & size (inch) of bearing assembly to be serviced

Accessory Description	Class B 4 1/2" x 8"	Class C 5" x 9"	Class D 5 1/2" x 10"	Class E 6" x 11"	Class EE 5 1/2" Axle	Class EE 6" Axle	Class F 6 1/2" x 12"	Class G 7" x 12"	Class G 6 1/2" Axle	Class GG 6 1/2" Axle
Pulling Shoe	No. PXF0442 is included as part of basic machine							PXF0443	PXF0443	PXF0443
Pulling Shoe Insert Adapter	PXF0440	PXF0437	PXF0438	PXF0439	PXF0439	PXF0441	PXF0441	~	~	~
Guide Tube & Cap Screw Assembly	PXF0435-1	PXF0435-2	PXE2605	PXE2606	PXE2607	PXE2608	PXE2609	PXE2611	PXE2610	PXE2612
Cap Screw	PXH0423	PXH0424	PXH0425	PXH0426	PXH0427	PXH0425	PXH0428	PXH0430	PXH0429	PXH0429
Guide Tube Adapter	PXB1247	PXB1246	PXB1246	PXB1248	PXB1248	PXB1248	PXB1248	PXB1248	PXB1248	PXB1248
Installing Tube	No. PXD1044 is included as part of basic machine							PXD1045	PXD1045	PXD1045
Installing Tube Adapter Ring	PXB1243	PXD1037	PXD1038	PXD1039	PXD1039	PXD1040	PXD1040	PXD1042	PXD1041	PXD1041

Note: Adapter listed above are for servicing the following roller bearing assemblies: Brence" Crown-Taper",

New Departure-Hyatt " HyRoll Taper ", SKF " Expediter" and T i mken"AP"-

*Screws are supplied with the guide tube and should be ordered as replacements only.

SPECIFICATIONS

Model No.	Stroke (in.)	Capacity (Ton)		A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	Weight (lbs.)
		Pull	Inst.							
PXP100T	15.4	100	68	25.7	14.6	41.2	35.4	76.4 - 87	60.2	1300
PXP100TE*	15.4	100	68	25.7	14.6	41.2	35.4	76.4 - 87	60.2	1775
PXM100TE*	10	100	68	24.7	15.1	28.8	35.8	51.1	46.3	904

*This model is equipped with the Electric Pump - PE594.

ELECTRIC PUMP - Specifications

Model No.	Acting	Reservoir Capacity (gallons)	Function	Motor (hp)	Flow (cubic in./min.)	
					1st Stage	2nd Stage
PE594	Double	3	Advance Hold Return	1 1/2	550	59

MODEL: PXSP SERIES

- Maximum working pressure: 10,000 psi / 700 Bar
- Custom sizes available
- Daylight 50T: 29 X 42 in
- Daylight 100T: 31 X 32 in
- Daylight 150T: 39 X 35 in
- Daylight 200T: 39 X 36 in
- Pump and cylinder matched for optimal operation

FEATURES

- Durable, high quality welded frame
- Fully adjustable bed
- Pendant controlled electric pump on all presses
- Worm screw adjustment for lateral cylinder positioning
- V blocks / press plate included on models up to 100 t


OPTIONS

- Pump available with solenoid valve or manual valve
- 115V and 220V options available
- Electric, air and hand pump options available
- Single and double acting models available
- Safety cages



SPECIFICATIONS

Model	Tons	Cylinder Stroke (in)	Single Acting	Double Acting	115V	220V	Valve Type		Pump to Cylinder speed No load / Load (sec/in)
							Manual	Solenoid	
PXSP50	50	6	✓		✓		✓		2.6 / 38
PXSP50D	50	6		✓	✓		✓		2.6 / 38
PXSP50DS	50	6		✓	✓			✓	2.6 / 38
PXSP100	100	10	✓		✓		✓		4.9 / 71
PXSP100D	100	13		✓	✓		✓		2.4 / 27
PXSP100DS1	100	13		✓				✓	2.4 / 27
PXSP100DS2	100	13		✓		✓		✓	2.0 / 11
PXSP150DS1	150	13		✓	✓			✓	3.2 / 34
PXSP150DS2	150	13		✓		✓		✓	3.2 / 17
PXSP200DS	200	13		✓		✓		✓	4.5 / 24

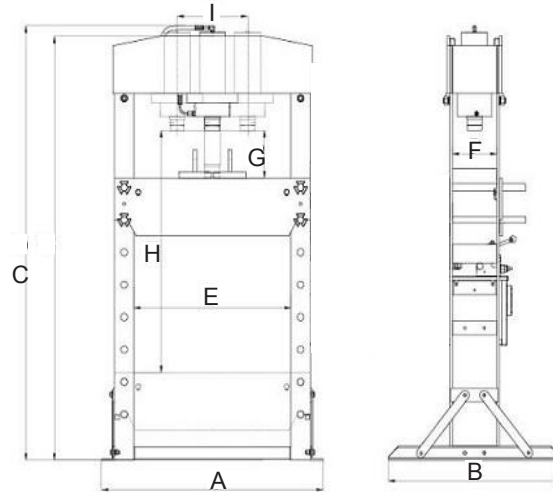


SPECIFICATIONS

Model	Tons	A	B	C	D	E	F	Working height		I
								G (min)	H (max)	
PXSP50*	55	40.8	31.5	72.1	72.2	28.7	8.1	3.1	41.7	9.6
PXSP100*	100	47.2	39	72	73.4	31	8.9	4.4	32	10
PXSP150*	150	57.2	39.2	80.1	82.2	39.4	9.4	2.5	35	13
PXSP200*	200	57.6	39.2	81.5	83	39.5	9.8	3.7	36.1	13.9

OPTIONAL ACCESSORIES

PRESS GUARD

Model	Applied Model	Length A (in)	Width B (in)
PG50	PXSP55*	24.6	26.6
PG100	PXSP100	28.7	30.5
PG150	PXSP150*	24.8	38.9

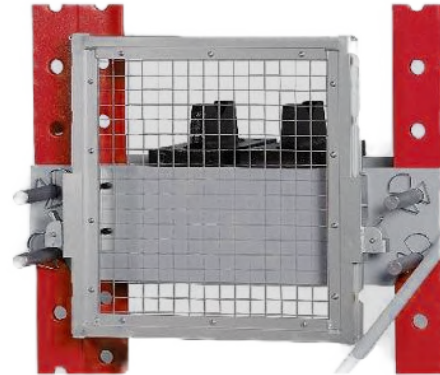

Contact us for 200 ton or clear guard options

PRESS PINS

Pin set	Model	Capacity (Ton)	Dia. A (in)	Dia. B (in)	Length C (in)	Net Weight (lbs)	Gross Weight (lbs)
PPS-025	PP336	2	0.4	1.0	2.0	16.5	17.6
	PP327	3	0.5	1.0	2.4		
	PP328	8	0.6	1.0	2.4		
	PP329	12	0.7	1.0	3.3		
	PP330	14	0.8	1.0	3.3		
	PP331	16	0.9	1.0	3.3		
	PP332	18	1.0	1.0	4.3		
	PP333	20	1.2	1.0	4.3		





Warranty To Commercial Customers High Pressure Hydraulic Products

PowerX International, LLC warrants its products and parts to a **LIFETIME WARRANTY AGAINST ANY DEFECTS IN MATERIAL OR WORKMANSHIP**. Any product proved to PowerX International, LLC satisfaction to be defective will be repaired or replaced, at PowerX International, LLC option, if returned to the nearest authorized service center, transportation charges prepaid. This does not include normal wear and tear or electrical and gasoline motors (which are covered under manufacturer's warranties). A full and complete explanation of the complaint, and proof of purchase date, must accompany the product. A return authorization number is required for all warranty claims. Please contact PowerX International, LLC for a RMA number. PowerX International, LLC sole obligation and the buyer's exclusive remedy under this warranty is limited to such repair or replacement.

POWERX INTERNATIONAL, LLC SHALL NOT BE LIABLE FOR ANY CONSEQUENTIAL, INCIDENTAL, OR SPECIAL DAMAGES INCLUDING BUT NOT LIMITED TO LOSS OR DAMAGE RESULTING FROM USE OR LOSS OF USE OF POWERX INTERNATIONAL, LLC PRODUCTS WHATSOEVER, WHETHER BASED ON BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE OR OTHER TORT, OR ANY STRICT LIABILITY THEORY

This warranty does not apply to products subjected to accident, damage by circumstances beyond PowerX International, LLC control, improper operation, maintenance or storage, or to other than normal application, use or service.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

POWERX INTERNATIONAL, LLC
21860 Watertown Road
Waukesha, WI 53186-1824
Phone: 414-988-6202
Fax: 414-988-6212
www.powerxinternational.com

D0111 0517 RevA